


Outside Fitting Flange Protectors

The Original. Easy to install full flange-face protection. This precise fitting wrap-around protector offers easier handling than any other product in the industry. Its style is ideal for coated and conical bore flanges.

prompt

MADE-TO-ORDER
VOLUME

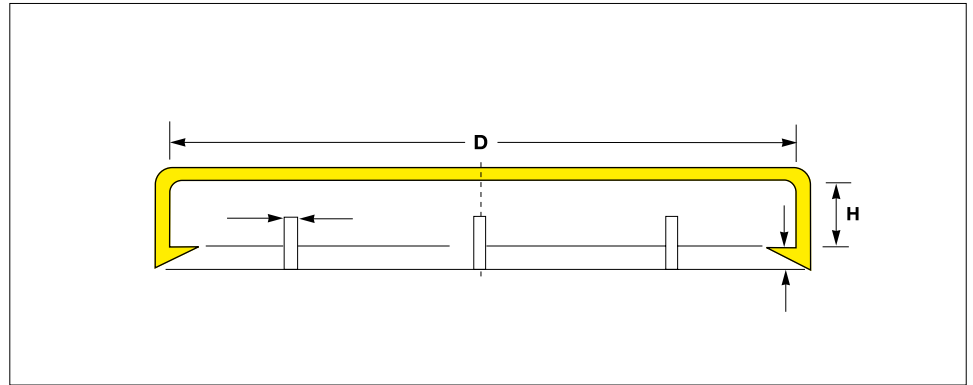

10" - 150
DN 300 PN 16
INT. PAT. PEND.

DIN

All dimensions in mm

Material :
LLD-PE,
linear low density polyethylene

Standard Colour :
yellow

Just simply push over the flange diameter. This unique style automatically slips over the flange to protect the face as well as the sides.

Far easier to remove than any other full-face, wrap-around protector on the market. Its unique design allows coated and conical bore flanges to be easily protected.

From DN 10 - DN 300 and 1/2" - 10." acc. to EN 12351, DIN 3443-B, ANSI B 16.5 and BASF WN 14-150 Form B

Think Plastic. Go Protec.®

**PROTEC
PLASTICS**

Dimensions Nom Ø	Series Pressure Group	D Ø Flange	H Int. Protector Depth	↓	Standard Pack	Reference No.
DN 15	PN 10, 16, 25, 40	95.0	17.0	7.5	200	EP 310 / 15/10-40
DN 20	PN 10, 16, 25, 40	105.0	19.0	7.5	150	EP 310 / 20/10-40
DN 25	PN 10, 16, 25, 40	115.0	19.0	7.5	150	EP 310 / 25/10-40
DN 32	PN 10, 16, 25, 40	140.0	19.0	7.5	150	EP 310 / 32/10-40
DN 40	PN 10, 16, 25, 40	150.7	19.5	7.5	125	EP 310 / 40/10-40
DN 50	PN 10, 16, 25, 40	165.0	21.0	7.5	100	EP 310 / 50/10-40
DN 65	PN 10, 16, 25, 40	185.0	22.0	7.5	75	EP 310 / 65/10-40
DN 80	PN 10, 16, 25, 40	200.0	24.0	7.5	60	EP 310 / 80/10-40
DN 100	PN 10, 16	220.0	24.0	7.5	50	EP 310 / 100/10-16
DN 100	PN 25, 40	235.0	24.0	7.5	50	EP 310 / 100/25-40
DN 125	PN 10, 16	250.0	25.0	7.5	40	EP 310 / 125/10-16
DN 150	PN 10, 16	285.0	25.0	7.5	30	EP 310 / 150/10-16
DN 150	PN 25, 40	300.0	27.0	7.5	30	EP 310 / 150/25-40
DN 200	PN 10, 16	340.0	27.0	7.5	20	EP 310 / 200/10-16
DN 200	PN 25	360.0	30.0	12.0	20	EP 310 / 200/25
DN 200	PN 40	375.0	34.0	7.5	20	EP 310 / 200/40
DN 250	PN 10	395.0	29.0	8.0	20	EP 310 / 250/10
DN 250	PN 16	406.5	30.0	8.5	20	EP 310 / 250/16
DN 300	PN 10	445.0	29.0	7.8	25	EP 310 / 300/10
DN 300	PN 16	460.0	31.0	8.0	20	EP 310 / 300/16

Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Outside Fitting Flange Protectors


The Original. Easy to install full flange-face protection. This precise fitting wrap-around protector offers easier handling than any other product in the industry. Its style is ideal for coated and conical bore flanges.

TRIPLE ADVANTAGE of PROTEC CAPTOP®

QUALITY. Just simply push over the flange diameter. This unique style automatically slips over the flange to protect the face as well as the sides. Far easier to remove than any other full-face, wrap-around protector on the market. Its unique design allows coated and conical bore flanges to be easily protected.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. Innovative protective closures at the best price in the market.

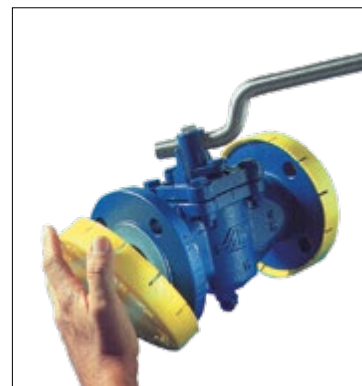

CAPTOP®



ANSI B 16.5

All dimensions in mm

Dimensions Nom Ø	Series Pressure Group	D Ø Flange	H Int. Protector Depth	↓	Standard Pack	Reference No.
.1/2"	150	89.0	14.2	7.5	250	EP 310 / .1/2" /150
.1/2"	300	95.0	17.0	4.5	250	EP 310 / .1/2" /300
.1/2"	600	95.0	17.0	4.5	250	EP 310 / .1/2" /600
.3/4"	150	98.5	15.7	7.5	200	EP 310 / .3/4" /150
1."	150	108.0	17.5	7.5	150	EP 310 / 1." /150
1."	300	124.0	20.5	4.5	175	EP 310 / 1." /300
1."	600	124.0	20.5	7.5	175	EP 310 / 1." /600
1.1/2"	150	127.0	20.5	7.5	175	EP 310 / 1.1/2" /150
2."	150	152.4	22.1	4.5	100	EP 310 / 2." /150
2."	300	165.0	21.0	4.5	100	EP 310 / 2." /300
3."	150	190.5	27.0	7.5	60	EP 310 / 3." /150
4."	150	228.5	28.0	7.3	40	EP 310 / 4." /150
6."	150	279.5	29.2	7.5	25	EP 310 / 6." /150
10."	150	406.5	30.0	8.5	20	EP 310 / 10." /150

Should your requirements not be shown please ask for a separate quotation. PROTEC products and specifications are subject to improvement and change without notice.

ANSI B 15.5
EN 12351-A.2
DIN 3443, Form B
BASF WN 14-150, A

Material :
LLD-PE,
linear low density polyethylene

Standard Colour :
yellow

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

PROTEC
PLASTICS